

The RICH detector of the NA62 experiment at CERN

Aisa, D.; Anzivino, G.; Bizzetti, A.; Bucci, F.; Campeggi, C.; Carassiti, V.; Cassese, A.; Cenci, P.; Ciaranfi, R.; Duk, V.; Farnesini, L.; Fry, J.R.; Iacopini, E.; Lami, S.; Lenti, M.; Maletta, F.; Pepe, M.; Piandani, R.; Piccini, M.; Piluso, A.

DOI:

[10.1016/j.nima.2014.06.089](https://doi.org/10.1016/j.nima.2014.06.089)

License:

Other (please specify with Rights Statement)

Document Version

Peer reviewed version

Citation for published version (Harvard):

Aisa, D, Anzivino, G, Bizzetti, A, Bucci, F, Campeggi, C, Carassiti, V, Cassese, A, Cenci, P, Ciaranfi, R, Duk, V, Farnesini, L, Fry, JR, Iacopini, E, Lami, S, Lenti, M, Maletta, F, Pepe, M, Piandani, R, Piccini, M, Piluso, A, Santoni, C, Schneider, T, Sergi, A & Wertelaers, P 2014, 'The RICH detector of the NA62 experiment at CERN', *Nuclear Instruments & Methods in Physics Research. Section A. Accelerators, Spectrometers, Detectors*, vol. 766, pp. 1-4. <https://doi.org/10.1016/j.nima.2014.06.089>

[Link to publication on Research at Birmingham portal](#)

Publisher Rights Statement:

NOTICE: this is the author's version of a work that was accepted for publication. Changes resulting from the publishing process, such as peer review, editing, corrections, structural formatting, and other quality control mechanisms may not be reflected in this document. Changes may have been made to this work since it was submitted for publication. A definitive version was subsequently published as D. Aisa, G. Anzivino, A. Bizzetti, F. Bucci, C. Campeggi, V. Carassiti, A. Cassese, P. Cenci, R. Ciaranfi, V. Duk, L. Farnesini, J.R. Fry, E. Iacopini, S. Lami, M. Lenti, F. Maletta, M. Pepe, R. Piandani, M. Piccini, A. Piluso, C. Santoni, T. Schneider, A. Sergi, P. Wertelaers, The RICH detector of the NA62 experiment at CERN, *Nuclear Instruments and Methods in Physics Research A*, <http://dx.doi.org/10.1016/j.nima.2014.06.089>

General rights

Unless a licence is specified above, all rights (including copyright and moral rights) in this document are retained by the authors and/or the copyright holders. The express permission of the copyright holder must be obtained for any use of this material other than for purposes permitted by law.

- Users may freely distribute the URL that is used to identify this publication.
- Users may download and/or print one copy of the publication from the University of Birmingham research portal for the purpose of private study or non-commercial research.
- User may use extracts from the document in line with the concept of 'fair dealing' under the Copyright, Designs and Patents Act 1988 (?)
- Users may not further distribute the material nor use it for the purposes of commercial gain.

Where a licence is displayed above, please note the terms and conditions of the licence govern your use of this document.

When citing, please reference the published version.


Take down policy

While the University of Birmingham exercises care and attention in making items available there are rare occasions when an item has been uploaded in error or has been deemed to be commercially or otherwise sensitive.

If you believe that this is the case for this document, please contact UBIRA@lists.bham.ac.uk providing details and we will remove access to the work immediately and investigate.

The RICH detector of the NA62 experiment at CERN

D. Aisa, G. Anzivino, A. Bizzetti, F. Bucci, C. Campeggi, V. Carassiti, A. Cassese, P. Cenci, R. Ciaranfi, V. Duk, L. Farnesini, J.R. Fry, E. Iacopini, S. Lami, M. Lenti, F. Maletta, M. Pepe, R. Piandani, M. Piccini, A. Piluso, C. Santoni, T. Schneider, A. Sergi, P. Wertelaers

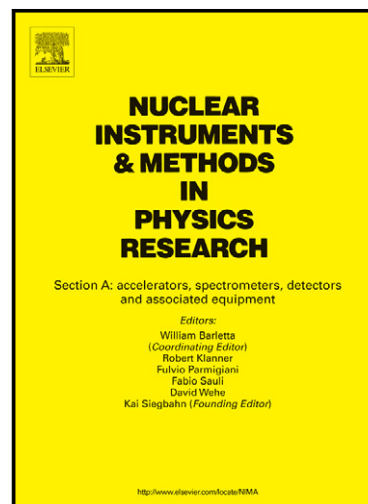

www.elsevier.com/locate/nima

PII: S0168-9002(14)00870-5
DOI: <http://dx.doi.org/10.1016/j.nima.2014.06.089>
Reference: NIMA56909

To appear in: *Nuclear Instruments and Methods in Physics Research A*

Cite this article as: D. Aisa, G. Anzivino, A. Bizzetti, F. Bucci, C. Campeggi, V. Carassiti, A. Cassese, P. Cenci, R. Ciaranfi, V. Duk, L. Farnesini, J.R. Fry, E. Iacopini, S. Lami, M. Lenti, F. Maletta, M. Pepe, R. Piandani, M. Piccini, A. Piluso, C. Santoni, T. Schneider, A. Sergi, P. Wertelaers, The RICH detector of the NA62 experiment at CERN, *Nuclear Instruments and Methods in Physics Research A*, <http://dx.doi.org/10.1016/j.nima.2014.06.089>

This is a PDF file of an unedited manuscript that has been accepted for publication. As a service to our customers we are providing this early version of the manuscript. The manuscript will undergo copyediting, typesetting, and review of the resulting galley proof before it is published in its final citable form. Please note that during the production process errors may be discovered which could affect the content, and all legal disclaimers that apply to the journal pertain.

The RICH detector of the NA62 experiment at CERN

D. Aisa^{a,b}, G. Anzivino^{a,b}, A. Bizzetti^{c,d}, F. Bucci^d, C. Campeggi^{a,b},
 V. Carassiti^e, A. Cassese^{d,f}, P. Cenci^b, R. Ciaranfi^d, V. Duk^b, L. Farnesini^b,
 J. R. Fry^{g,h}, E. Iacopini^{d,f}, S. Lamiⁱ, M. Lenti^d, F. Maletta^d, M. Pepe^b,
 R. Piandaniⁱ, M. Piccini^b, A. Piluso^{a,b}, C. Santoni^{a,b}, T. Schneider^h, A. Sergi^j,
 P. Wertelaers^h

^a*Dipartimento di Fisica dell'Università di Perugia*

^b*INFN - Sezione di Perugia*

^c*Dipartimento di Fisica dell'Università di Modena e Reggio Emilia*

^d*INFN - Sezione di Firenze*

^e*INFN - Sezione di Ferrara*

^f*Dipartimento di Fisica dell'Università di Firenze*

^g*University of Liverpool*

^h*CERN*

ⁱ*INFN - Sezione di Pisa*

^j*University of Birmingham*

Abstract

The NA62 experiment at CERN aims to measure the branching ratio of the ultra-rare charged kaon decay $K^+ \rightarrow \pi^+ \nu \bar{\nu}$ with a 10% accuracy and with a background contamination at the 10% level. Since the branching ratio of this decay is $O(10^{-10})$, to fulfill such request one of the main backgrounds, the decay $K^+ \rightarrow \mu^+ \nu$ (BR $\sim 63\%$), must be suppressed by a rejection factor of 4×10^{-13} (assuming 10% signal acceptance). This can be partially accomplished using a combination of kinematical cuts (8×10^{-6}) and the different power of penetration through matter of pions and muons (10^{-5}). A further 5×10^{-3} suppression factor will be provided by a RICH detector, in a momentum range between 15 and 35 GeV/c. The details of the RICH project as well as the results from test runs performed on a RICH prototype of the same length of the final detector will be presented. The current status of the construction and the description of the final readout and trigger electronics will also be reviewed.

Keywords: Cherenkov radiation, RICH, Kaon physics, Rare decays

1. Introduction

The NA62 experiment [1] at CERN will start to take data in fall 2014 to measure the branching ratio of the ultra-rare charged kaon decay $K^+ \rightarrow \pi^+ \nu \bar{\nu}$ with a 10% accuracy and with a background contamination at the 10% level. The downstream RICH detector will be fundamental to suppress the background from decays with a muon in the final state (mainly $K^+ \rightarrow \mu^+ \nu$). In fact the RICH will allow to reject muons contaminating the pion sample with a suppression factor of the order of 5×10^{-3} in a momentum range between 15 and 35 GeV/c. The RICH detector must also provide the pion crossing time with a resolution of the order of 100 ps to minimize wrong matching with the decaying kaon measured by an upstream detector. The RICH will stand a rate of about 10 MHz and will be a key element of the NA62 trigger system.

2. The NA62 RICH

The NA62 RICH detector (see Fig. 1) consists of a cylindrical vacuum-proof steel vessel, about 18 m long and with diameter ranging from 3.4 to 4 m (four sections). Neon gas at atmospheric pressure and room temperature is used as radiator element (refractive index $n=1.0000665$ for a photon wavelength of $\lambda = 420$ nm). An evacuated vacuum tube (beam pipe) is present along all the detector axis to avoid the interaction of the particles of the charged beam with the radiator. The Cherenkov light is reflected by a mosaic of 18 hexagonal and 2 semi-hexagonal (central area) spherical mirrors with 17 m focal length, made of 2.5 cm thick glass. They cover a total surface of about 3 m in diameter, providing the full coverage for the Cherenkov photons emitted by π and μ traveling inside the geometrical acceptance of the downstream detectors. The right and the left sides of the mirror surfaces have two different center of curvatures in order to avoid that the reflected photons hit the beam pipe without reaching the sensitive devices. The mirrors will be individually hung on a light aluminium structure (support panel) and moved by means of two piezo-motors each, in order to align the light toward the two focal points.

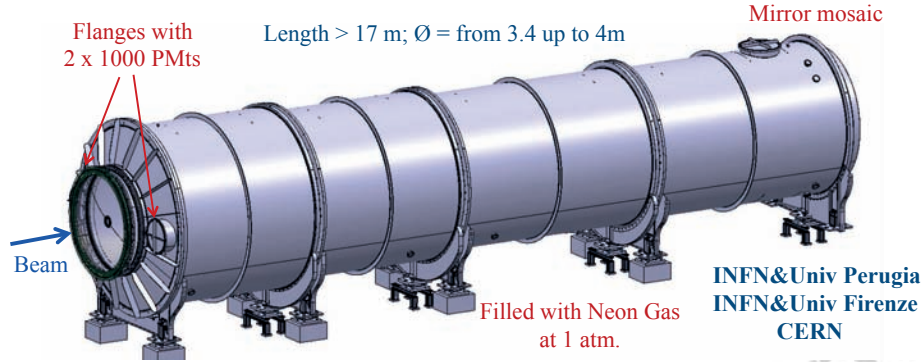


Figure 1: Layout of the RICH vessel.

48 The reflected light is collected by about 2000 Hamamatsu R7400-U03 photo-
 49 multipliers (PM) with 18 mm pixel size and good quantum efficiency and timing
 50 performances. These metal packaged PMs were chosen for their compactness
 51 and fastness after the comparison tests carried-on during the 2007 test run. The
 52 R7400 PM has a polyoxymethylene insulation cover of roughly cylindrical shape.
 53 The photocathode (with 8 mm minimum active diameter) is bialkali made and
 54 has a typical radiant sensitivity of 62 mA/W at the 420 nm peak wavelength,
 55 corresponding to a 20% quantum efficiency; the PM wavelength sensitivity is
 56 between 185 and 650 nm. The typical PM gain is 1.5×10^6 at 900 V (working
 57 voltage). The R7400-U03 typical rise time is 0.78 ns, the transit time is 5.4 ns
 58 and the transit time jitter is 0.28 ns (FWHM). The eight PM dynode voltages
 59 are provided through a custom made HV divider (28 M Ω total resistance), which
 60 has a cylindrical shape and three cables: one for signal output and two cables
 61 for high voltage (negative) supply and for grounding (see Fig. 2).

62 The PMs are assembled in a compact hexagonal packing into two aluminium
 63 discs, placed on both the sides of the vessel at the entrance window in corre-
 64 spondence to the two different focal surfaces. Winston cones [2] carved in the
 65 discs and covered with aluminized mylar are used to convey the light onto the
 66 active PM area, thus increasing light collection. The PMs will be powered by
 67 four CAEN SY2527 crates equipped with A1535S boards, each one providing 24



Figure 2: The HAMAMATSU R7400 U-03 photomultiplier connected to the custom made divider.

68 HV channels. In order to reduce the number of modules, each HV channel will
 69 power 4 PMs. Quartz windows are used to separate the PMs from the Neon in
 70 order to avoid electrical discharges at the working voltage.

71 The PM signal is sent to custom-made current amplifiers with differential
 72 output and then to NINO chips [3] used as discriminators operating in time-
 73 over-threshold mode. The RICH readout and trigger electronics will make use
 74 of the integrated trigger and data acquisition system (TDAQ) developed to read
 75 most of the NA62 detector in a common way. The key element of the TDAQ
 76 system is an upgraded version of the LHC TELL1 board [4], called TEL62 [5]
 77 (see Fig. 3). Digitized signals from the RICH are sent to a custom-made TDC
 78 board [6] (TDCB) housing four CERN HPTDCs [7]. The TDCB (mezzanine
 79 board) sends leading and trailing time of the incoming signals to the TEL62
 80 (mother board). In the TEL62 the signal are handled both to produce L0
 81 trigger primitives and to send relevant data to the next element of the readout

chain (online PC farm).



Figure 3: The TEL62 mother board. At the bottom-left a plugged TDCB is also shown.

82

83 In the NA62 experiment a three-level trigger system will reduce the 10 MHz
 84 detector rate to about 10 kHz. The Level 0 (L0) will decrease the event rate
 85 from 10 to 1 MHz employing signals from RICH, photon veto system, charged
 86 hodoscope and muon veto detector. The higher level trigger is based on PCs and
 87 will reduce the rate of the events to 10 kHz level. The excellent time resolution
 88 of the RICH can be exploited in the L0 trigger to determine the reference time
 89 of the tracks and this is a crucial feature to get an efficiency better than 95% for
 90 signal events. Studies on multiplicity variables to identify multiple track events
 91 and to reject fake signals produced by electronics noise show promising results
 92 already at L0. At the next trigger level (L1) the RICH will provide the number
 93 and the position of the Cherenkov rings, helping to reject events with more than
 94 one charged particle in the final state. Charged particle with $\beta = 1$ (electrons)
 95 can be even rejected using the reconstructed ring radius. The possibility to
 96 use a GPU-based system instead of standard CPUs, in order to speed up the
 97 reconstruction already at trigger level, is also under consideration [8]. In the
 98 last trigger level (L2) for each event the RICH data are merged with the data

incoming from the other sub-detectors; at this level complex selection criteria will be applied exploiting those combined information and the RICH will be fundamental to perform particle identification.

3. Results from tests

The detector performances have been validated in two tests of a full 17 m length prototype done at CERN with charged beams in 2007 and 2009. The 2007 test was useful to select the photomultiplier type to be used for the final detector and has confirmed that a resolution better than 100 ps is achievable offline for the time measurement of charged particles [9]. With the data collected during the 2009 test has been shown that a pion sample can be selected with a muon contamination of 0.7% [10] (see Fig. 4); it has been obtained once the results of the test at different energies were properly weighted with the expected spectrum of the pions produced in the $K^+ \rightarrow \pi^+ \nu \bar{\nu}$ decay. The data analysis has also shown that a significant contribution to the measured contamination is due to δ -electrons produced in the material in front of the RICH prototype. The $\pi - \mu$ separation can be improved up to the requested value either increasing the corresponding π loss of about 1% or reducing the amount of material upstream the final RICH detector. The analysis of the 2009 data has also confirmed that a resolution better than 100 ps is achievable for the time measurement of charged particles with momentum between 15 and 35 GeV/c (see Fig. 5).

4. Status of the construction

The construction of the detector is almost completed and the installation has started at the beginning of 2014; the RICH is on schedule to be ready for the first physics run foreseen in fall 2014. In particular, the 4 sections composing the vacuum-proof vessel, built in 2013, are in the process of being installed in the NA62 experimental area.

The two flanges housing the 2000 PMs were produced in 2012 and all the quartz windows have been already glued at CERN (see Fig. 6). The installation

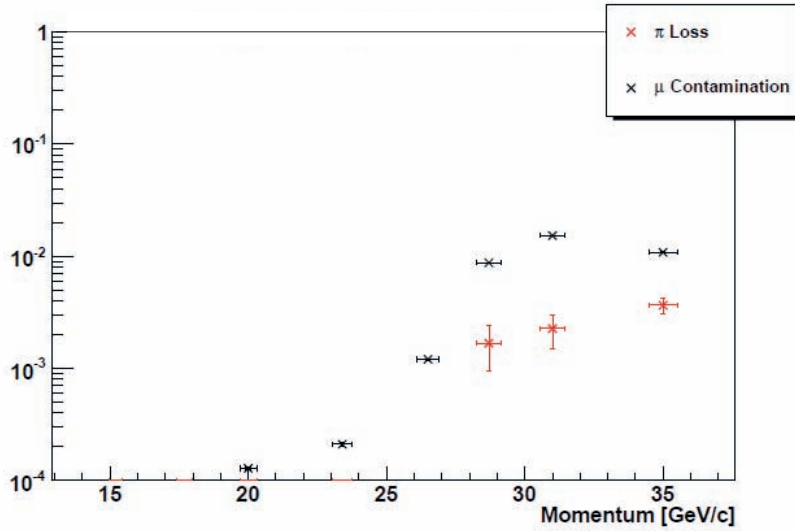


Figure 4: μ mis-identification probability and inefficiency on π selection as a function of pion momentum.

of the PMs in the flanges has already started in Firenze and the two parts will be delivered to CERN during the next summer.

The panel to support the mirrors (see Fig. 7) is under construction and will be delivered to CERN in spring 2014. The support panel will be made in aluminium honeycomb, in order to minimize the probability of particle interactions in front of the NA62 Electromagnetic Calorimeter that is located downstream with respect to the beam direction. A prototype of the support panel housing 3 dummy mirrors is under construction in Perugia and it is used to establish a correct procedure for the mirrors installation. The prototype is also used to design and produce the proper tools for the mirrors installation at CERN.

The 20 mirrors reflecting the Cherenkov light on the PM flanges have been already delivered to CERN and the aluminization and coating processes are just started.

[1] G. Anelli et Al., CERN-SPSC-2005-013 and CERN-SPSC-P-326, (2005).

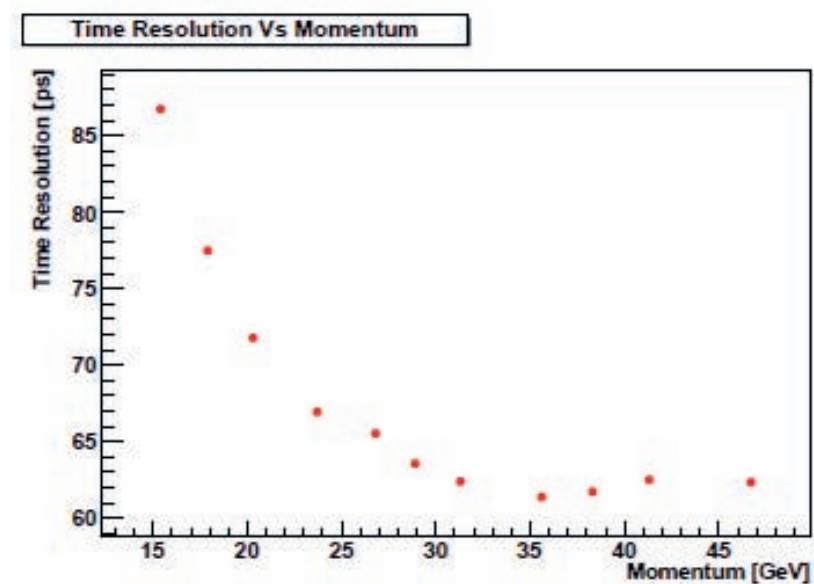


Figure 5: Time resolution as a function of pion momentum, defined as the average root mean square of the selected hit times with respect to their average.

- 141 [2] R. Winston, J. Opt. Soc. Am. 60 (1970) 245.
- 142 [3] F. Anghinolfi, P. Jarron, A.N. Martemiyarov, E. Usenko, H. Wenninger,
143 M.C.S. Williams, A. Zichichi, Nucl. Instr. and Meth. A 533 (2004) 183.
- 144 [4] G. Haefeli, A. Bay, A. Gong, H. Gong, M. Muecke, N. Neufeld, O. Schnei-
145 der, Nucl. Instr. and Meth. A 560 (2006) 494.
- 146 [5] B Angelucci, E Pedreschi, M Sozzi, F Spinella, Proceedings of Topical
147 Workshop on Electronics for Particle Physics 2011 (TWEPP-11) JINST 7
148 C02046 (2012).
- 149 [6] G. Collazuol et al., Proceedings of Nuclear Science Symposium Conference
150 Record (NSS/MIC), 2009 IEEE (2009) 1138.
- 151 [7] M. Mota, J. Christiansen, Proceedings of 2000 Nuclear Science Symposium
152 and Medical Imaging Conference Lyon, vol. 1520, (2000).

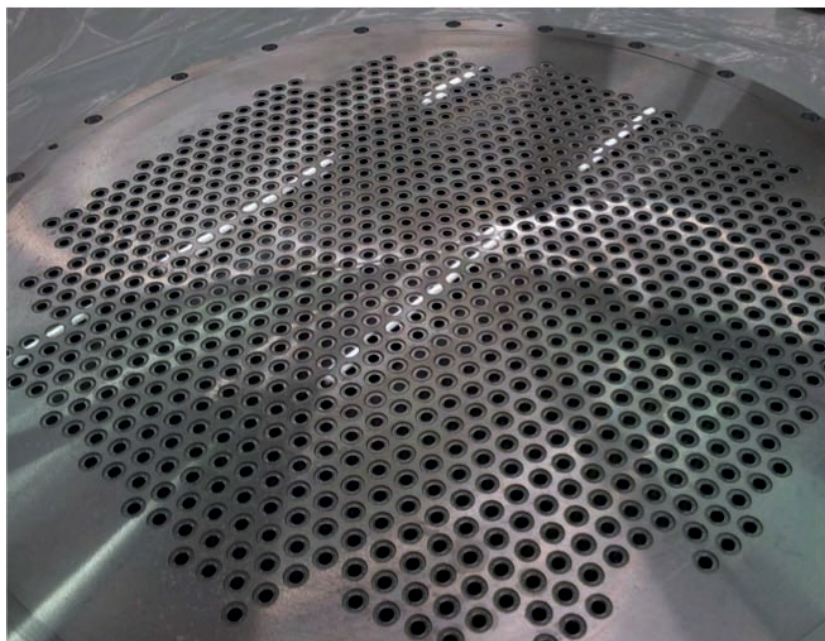


Figure 6: One of the two flanges housing the photomultipliers of the RICH detector (quartz window side).

- 153 [8] G. Lamanna, this issue, Proceedings of the 8th International Workshop on
154 Ring Imaging Cherenkov Detectors (RICH 2013).
- 155 [9] G. Anzivino et al., Nucl. Instrum. Meth. A 593 (2008) 314.
- 156 [10] B. Angelucci et al., Nucl. Instrum. Meth. A 621 (2010) 205.

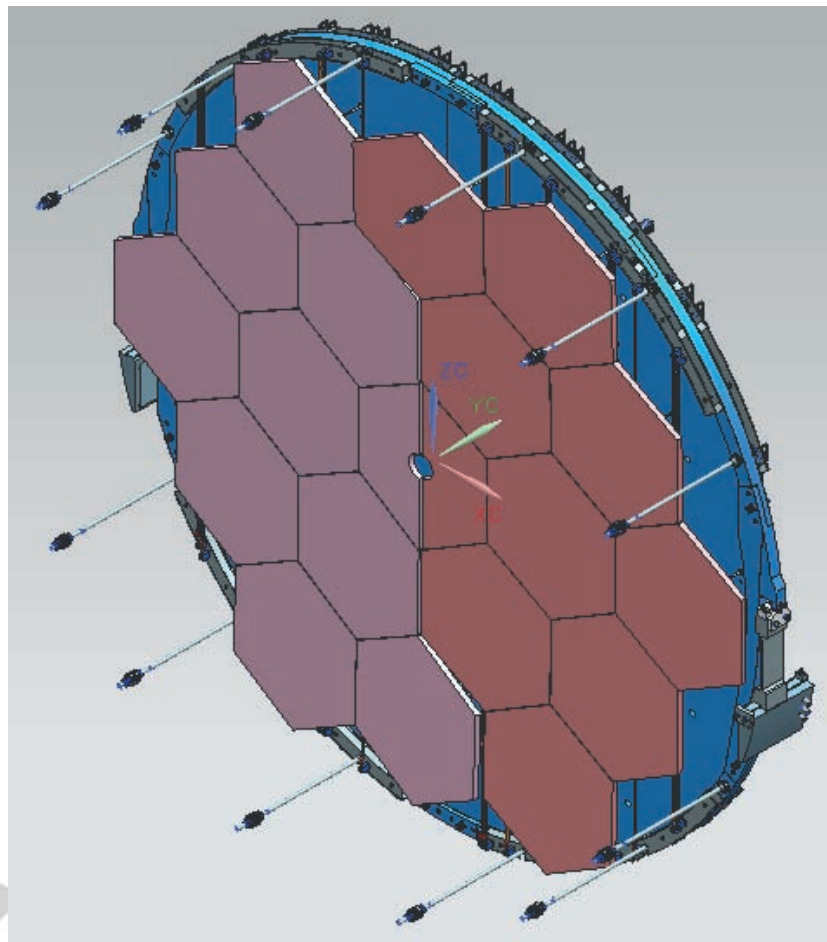


Figure 7: Layout of the panel supporting the RICH mirrors.